
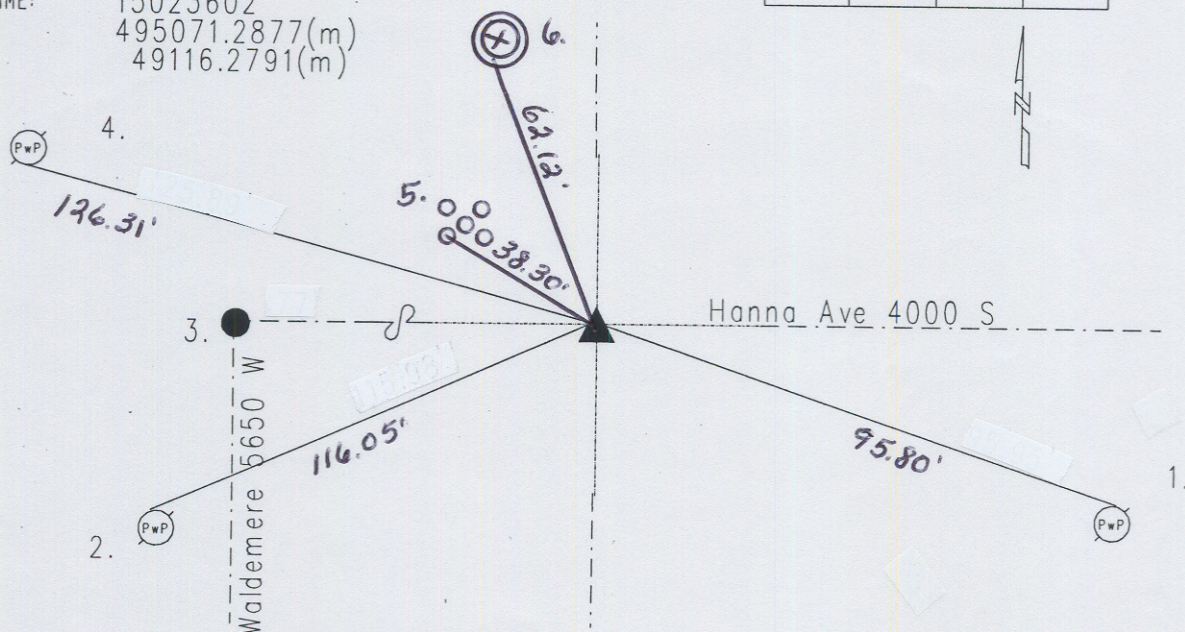


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 36 TOWNSHIP 15 RANGE 2
DATE: 4-23-01 8-20-07
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison monument
METHOD OF ESTABLISHMENT: County: 5-21-96

IN. S.P.C. E ZONE, NAD 83
NAME: 15023602
N: 495071.2877(m)
E: 49116.2791(m)

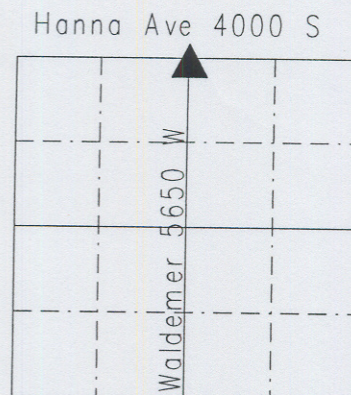

Original post set 1820 by Laughlin with witnesses: 14' beech W 37 E 12 links; 13" dogwood S 61 W 54 links per Marion County Atlas pg. 2. Hosbrook 3-16-1859 called no sonte but summary: I found both original beech stumps corresponding in course and distance except that the distance was about 1 link too great for the notes. Stumps were standing but too much decayed to find original marks. I, also, dug 1 foot found a decayed stick 6" long in a perpendicular position too much decay to discover if it had been sharpened. Immediately under it 18" from surface. Found perpendicular hole in solid earth, which was 1 1/2" in diameter and tapered to a point 18" or 20" below surface. Wilcoxon 2-12-81 called PK nail. Excavated by Wilcoxon 3-81 no mark found. Wilcoxon 10-9-89 called a PK nail. Established from N Q Q corner of the NEQ NWQ and NW corner of section. Excavated 5-21-96 Wilcoxon set Harrison per construction ties. Re-tied 5-21-96. Re-tied 4-23-01 by Wilcoxon.

15023602

REF.	DISTANCE	DESCRIPTION
1.	95.80'	Mag nail w/bw SW PwP#122-655 3"up
2.	116.05'	Mag nail w/bw NE PwP#100-654B 4"up
3.	77' +/-	Due W to C/L of Waldemer
4.	126.31'	PK nail w/bw S PwP#311-654A 12"up
5.	38.30'	Cut 'x' SW bolt of aluminum pole base
6.	62.12'	Cut 'x' center of sewer manhole